Forum for Electromagnetic Research Methods and Application Technologies (FERMAT)

Orbital Angular Momentum Generation Using a Bi-Layered Complementary Metasurface with a High Conversion Efficiency

Menglin L. N. Chen, Li Jun Jiang, and Wei E. I. Sha
Dept. Of EEE,
The University of Hong Kong
Contact: menglin@connect.hku.hk

Abstract: Electromagnetic (EM) waves with helical wavefront carry orbital angular momentum (OAM), which is associated with the azimuthal phase of the complex electric field. OAM is a new degree of freedom in EM waves and is promising for channel multiplexing in communication system. Although the OAM-carrying EM wave attracts more and more attention, the method of OAM generation at microwave frequencies still faces challenges, such as efficiency and simulation time. In this work, by using the circuit theory and equivalence principle, we build two simplified models, one for a single scatter and one for the whole metasurface to predict their EM responses. Both of the models significantly simplify the design procedure and reduce the simulation time. In this paper, we propose an ultrathin complementary metasurface that converts a left-handed (right-handed) circularly polarized plane wave without OAM to a right-handed (left-handed) circularly polarized wave with OAM of arbitrary orders and a high transmission efficiency can be achieved.

Keywords: Orbital angular momentum, ultrathin complementary metasurface, circuit theory, equivalence principle, Babinet's principle.

References:

1. L. Allen, M. W. Beijersbergen, R. Spreeuw, and J. Woerdman, "Orbital angular momentum of light and the transformation of laguerre-gaussian laser modes," Phys. Rev. A, vol. 45, no. 11, p. 8185, Jun. 1992.
2. M. L. N. Chen, L. J. Jiang, W. E. I. Sha, "Unltrathin complementary metasurface for orbital angular momentum generation at microwave frequencies," *IEEE Trans. Antennas Propagat.*, accepted.

*This use of this work is restricted solely for academic purposes. The author of this work owns the copyright and no reproduction in any form is permitted without written permission by the author. *

Menglin L. N. Chen (S'14) received the B.Eng. degree from the University of Birmingham, U.K., the B.S. degree from Huazhong University of Science and Technology, Wuhan, China, in 2012, and the M.S. degree from the University of Hong Kong, Hong Kong, in 2013, all in electronic engineering. She is currently working towards the Ph.D. degree at the Electromagnetics and Optics Research Lab, the Department of Electrical and Electronic Engineering, the University of Hong Kong, Hong Kong. From September 2013 to March 2014, she was a Research Assistant with the Department of Electrical and Electronic Engineering, the University of Hong Kong. Her research interests include antenna design and metamaterials.

Li Jun Jiang (S'01-M'04-SM'13) received the B.S. degree in electrical engineering from the Beijing University of Aeronautics and Astronautics in 1993, the M.S. degree from the Tsinghua University in 1996, and Ph.D from the University of Illinois at Urbana-Champaign in 2004. From 1996 to 1999, he was an application engineer with the Hewlett-Packard Company. Since 2004, he has been the postdoctoral researcher, the research staff member, and the senior engineer at IBM T.J. Watson Research Center. Since the end of 2009, he is an Associate Professor with the Department of Electrical and Electronic Engineering at the University of Hong Kong. From Sept. 2014 to Mar. 2015, he was also a visiting scholar at the University of California at Los Angeles. His research interests focus on electromagnetics, computational electromagnetics, IC signal/power integrity, IC EMC/EMI, antennas, multi-physics modeling, etc.

Wei E. I. Sha (M'08) received the B.S. and Ph.D. degrees in electronic engineering from Anhui University, Hefei, China, in 2003 and 2008, respectively. He was a Post-Doctoral Research Fellow with the Department of Electrical and Electronic Engineering, University of Hong Kong, Hong Kong, from 2008 to 2012, where he is currently a Research Assistant Professor. He has co-authored two books on wavelet theory and the finite-difference time domain method. He has authored 70 peer-reviewed journal papers included in the Web of Science Core Collection. He has also contributed to four book chapters at Springer, CRC Press, and InTech Publishers. He is involved in theoretical and computational research in electromagnetics and optics, focusing on multiphysics and interdisciplinary research. His research topics are inspired by applications in several areas including solar energy, microwave/optical communication, sensing/detection, and quantum information. His current research interests include fundamental and applied aspects in plasmonics, emerging photovoltaics, metasurfaces, quantum electrodynamics, and computational electromagnetics.

Orbital Angular Momentum Generation Using a Bi-Layered Complementary Metasurface with a High Conversion Efficiency

Menglin L. N. Chen, Li Jun Jiang, and Wei E. I. Sha

Dept. Of EEE,
The University Of Hong Kong

Contact: menglin@connect.hku.hk

CONTENTS

- Introduction of orbital angular momentum (OAM) of light
- Proposed ultra-thin complementary metasurface
  - Theoretical derivation
  - Conditions for ideal OAM generation
  - Modelling
    - Equivalent circuit model
    - Magnetic dipole approximation
  - Efficiency
- Conclusions

INTRODUCTION

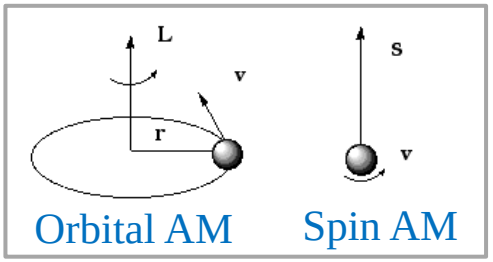

- **Angular momentum of light**
  - **Spin angular momentum (SAM), single photon, ± *ħ*, 0**
  - **Orbital angular momentum (OAM): optical vortex beam**

- **E.g.**



circularly polarized wave

S = σħ, σ, polarization helicity;
σ = ±1 for right- and left-hand circular polarizations

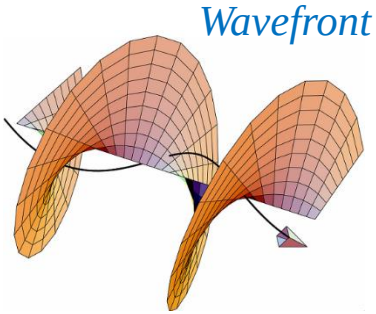

light carrying *OAM of order 1*

L = *lħ*, *l*, vortex topological charge;
l = *0*, ±1, ±2,…

- **Applications**
  - **Communication: radio, optical, quantum**
  - **Optical tweezers**

HISTORY OF OAM

- **Laguerre-Gaussian Modes[1]**

$$LG_{p\ell} = \sqrt{\frac{2p!}{\pi\,(p+|\ell|)!}}\frac{1}{w(z)}\left[\frac{r\sqrt{2}}{w(z)}\right]^{|\ell|}\exp\left[\frac{-r^2}{w^2(z)}\right]L_p^{|\ell|}\left(\frac{2r^2}{w^2(z)}\right)\exp[i\ell\phi]\times$$

$$\exp\left[\frac{ik_0r^2z}{2(z^2+z_R^2)}\right]\exp\left[-i(2p+|\ell|+1)\tan^{-1}\left(\frac{z}{z_R}\right)\right]$$

Radial index

Azimuth index

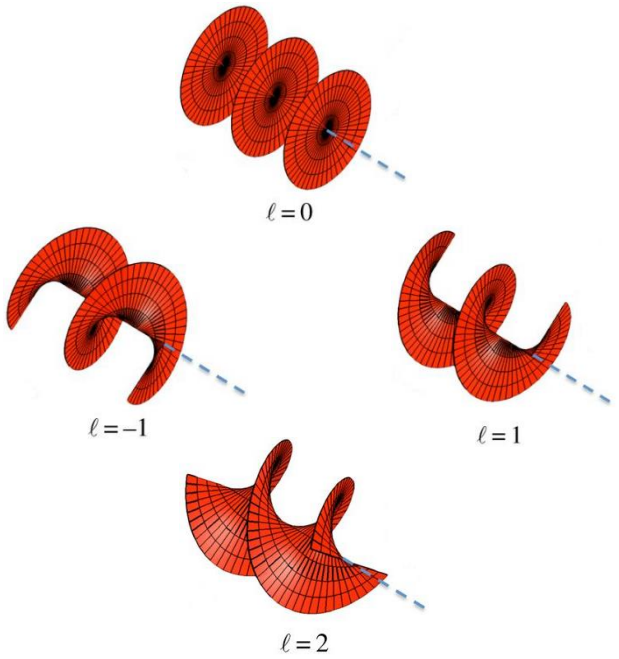

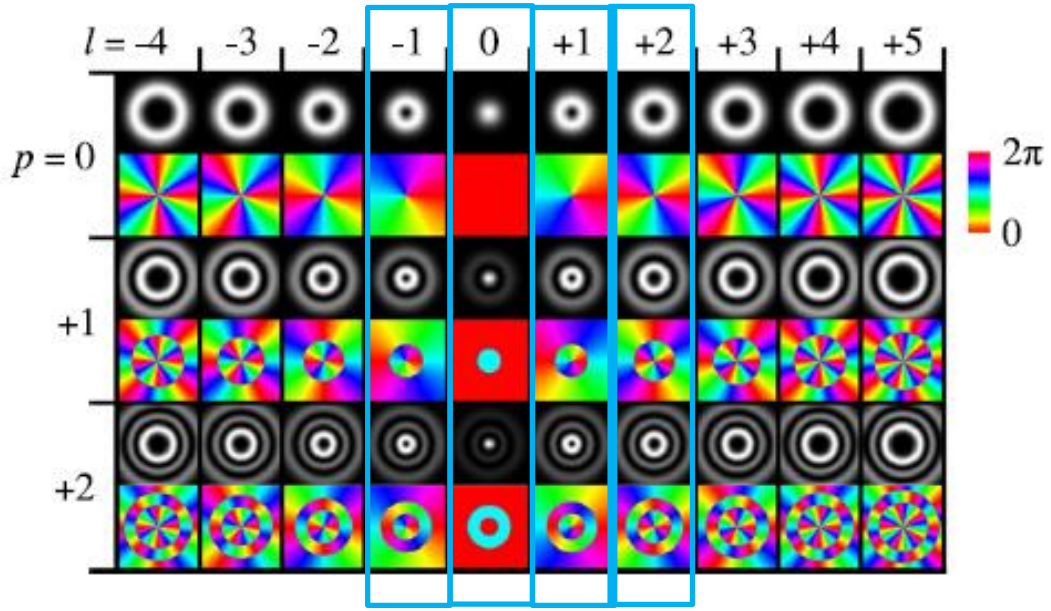

[1] A. M. Yao, and M. J. Padgett, "Orbital angular momentum: origins, behavior and applications," *Adv. Opt. Photonics*, vol. 3, no. 2, pp. 161-204, 2011.

REVIEW OF CURRENT WORK

- **Working principles**
  - **Spiral phase plate (SPP)**

    $e^{-i\ell d}$ ➡ $e^{-i\ell\varphi}$

  - **Spin-Orbit interactions**

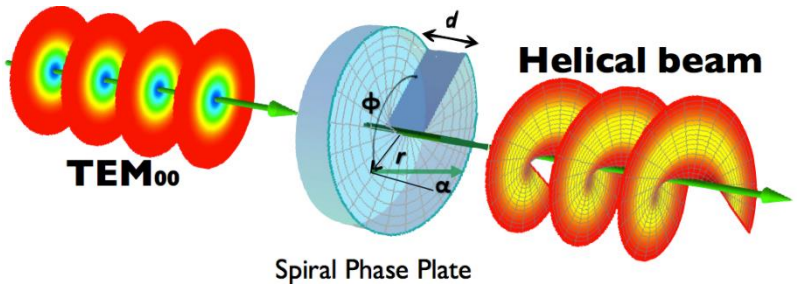

- **Existing prototypes**

Metasurface I [1]

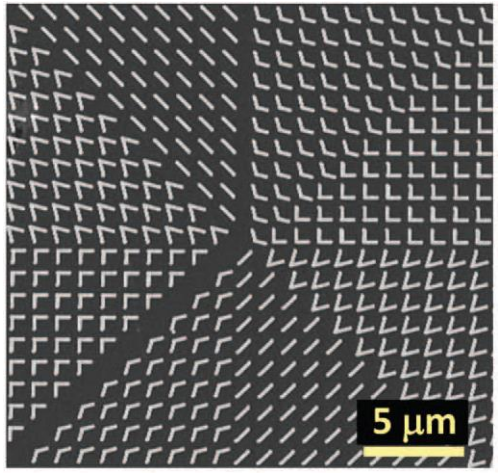

Metasurface II [2]

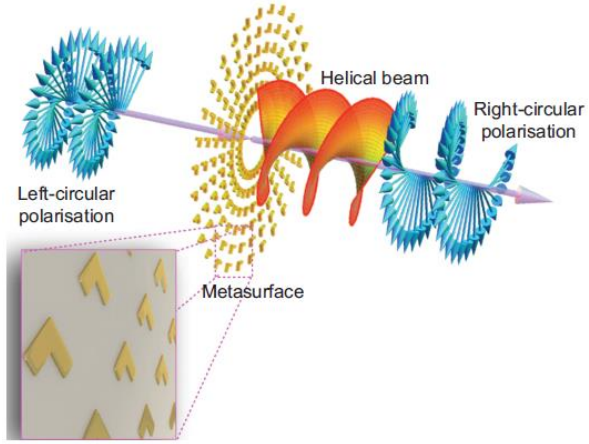

[1] N. Yu and F. Capasso, "Flat optics with designer metasurfaces," *Nature Mater.*, vol. 13, no. 2, pp. 139–150, Jan 2014.
[2]F. Bouchard, I. D. Leon, S. A. Schulz, J. Upham, E. Karimi, and R. W. Boyd, "Optical spin-to-orbital angular momentum conversion in ultrathin metasurfaces with arbitrary topological charges," *Appl. Phys. Lett.*, vol. 105, no. 10, p. 101905, Sep. 2014.

THEORETICAL DERIVATION

- **Jones vector**
  - **Describes the polarization state of light**

$$\mathbf{E}_i(\mathbf{r},t) = \begin{pmatrix} E_x^i \\ E_y^i \end{pmatrix} e^{i(kz-\omega t)} \qquad \mathbf{E}_s(\mathbf{r},t) = \begin{pmatrix} E_x^s \\ E_y^s \end{pmatrix} e^{i(kz-\omega t)}$$

$E^i_{x,y}$ and $E^s_{x,y}$ are Jones vectors for incident and scattered waves.

- **Jones matrix**
  - **Models an optical element / scatterer**

$$\begin{pmatrix} E_x^s \\ E_y^s \end{pmatrix} = \begin{pmatrix} J_{xx} & J_{xy} \\ J_{yx} & J_{yy} \end{pmatrix} \begin{pmatrix} E_x^i \\ E_y^i \end{pmatrix} = \overline{\mathbf{J}} \begin{pmatrix} E_x^i \\ E_y^i \end{pmatrix}$$

THEORETICAL DERIVATION (CONT.)

- **Scatterer under rotation**

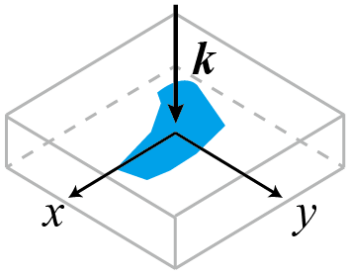

$$\overline{\mathbf{J}} = \begin{pmatrix} J_{xx} & J_{xy} \\ J_{yx} & J_{yy} \end{pmatrix}$$



$$\overline{\mathbf{J}}(\alpha) = R(-\alpha)\,\overline{\mathbf{J}}\,R(\alpha)$$

$$R(\alpha) = \begin{pmatrix} \cos\theta & \sin\theta \\ -\sin\theta & \cos\theta \end{pmatrix}$$

- **Special form**
  - $J_{yy} = -J_{xx}$ & $J_{yx} = J_{xy}$

$$\overline{\mathbf{J}}(\alpha) = \begin{pmatrix} J_{xx}\cos(2\alpha) - J_{xy}\sin(2\alpha) & J_{xx}\sin(2\alpha) + J_{xy}\cos(2\alpha) \\ J_{xx}\sin(2\alpha) + J_{xy}\cos(2\alpha) & J_{xy}\sin(2\alpha) - J_{xx}\cos(2\alpha) \end{pmatrix}$$

  - **Circular basis**

$$\overline{\mathbf{J}}_c(\alpha) = \begin{pmatrix} 0 & e^{-2i\alpha}(J_{xx} - iJ_{xy}) \\ e^{2i\alpha}(J_{xx} + iJ_{xy}) & 0 \end{pmatrix}$$

$e^{\pm 2i\alpha}$, geometric phase

CONDITIONS FOR IDEAL OAM GENERATION

- **Scatterers with spatially varying rotation angle α according to its azimuthal location angle φ**
  - **OAM order of $l = 2\alpha / \varphi$**

$e^{-2i\alpha}$

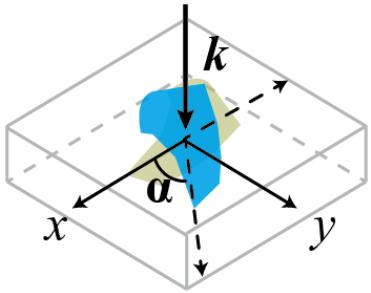

α, rotation angle

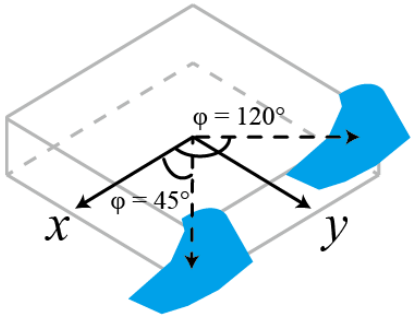

$e^{-il\varphi}$

φ, azimuthal angle

- **Perfect conversion (100%)**
  - **J_{xx} and J_{yy} have unit amplitude and 180° phase difference**
  - **$J_{xy} = J_{yx} = 0$**

$$J_{yy} = -J_{xx} \;\&\; J_{yx} = J_{xy} \quad \overline{\mathbf{J}}_c(\alpha) = \begin{pmatrix} 0 & e^{-2i\alpha}(J_{xx} - iJ_{xy}) \\ e^{2i\alpha}(J_{xx} + iJ_{xy}) & 0 \end{pmatrix}$$

SCATTERER DESIGN

- **Objective**
  - **Scatterer: transmission type**
  - **Requirements: mag(T_{yy}) = mag(T_{xx}), phase(T_{yy}) - phase(T_{xx}) =180° and $T_{yx} = T_{xy} = 0$**
- **Complementary frequency selective surface (FSS)**
  - **One-layer split ring resonator**
  - **Equivalent circuit model**

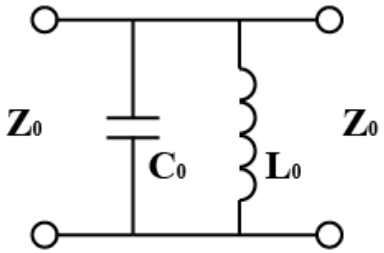

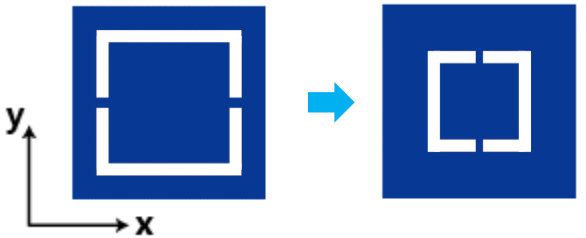

y polarization *x* polarization

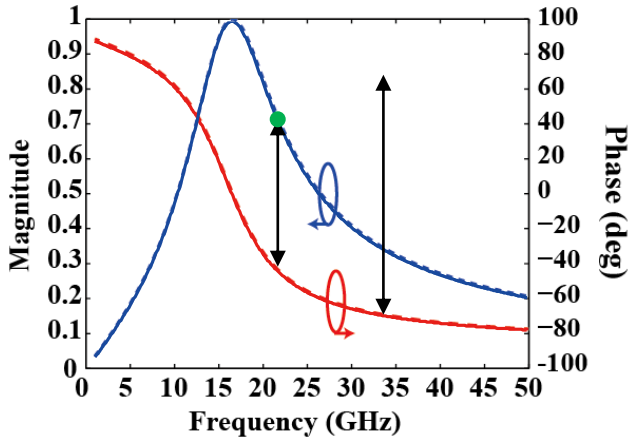

- **Problem**
  - **Cannot achieve the phase requirement and high transmission simultaneously**

SCATTERER DESIGN (CONT.)

- **Bi-layer complementary split ring resonators (CSRRs)**

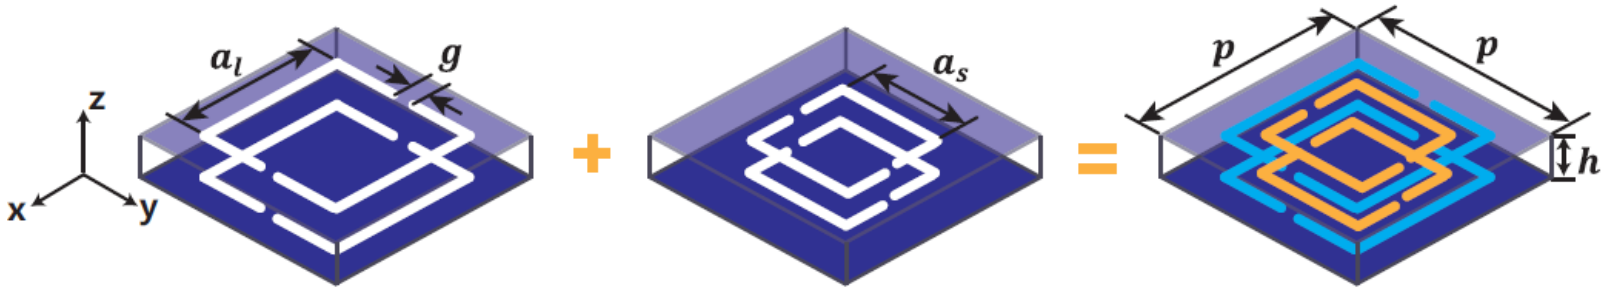

y polarization *x* polarization

- **Equivalent circuit model**
  - Can achieve the phase requirement with high transmission simultaneously

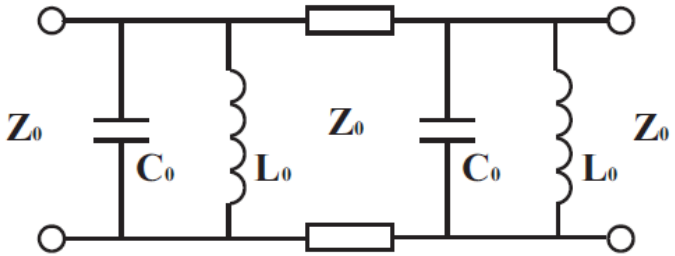

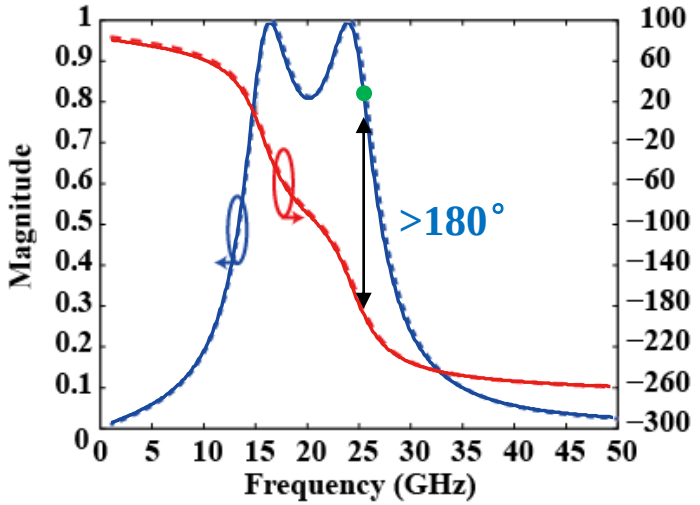

SCATTERER SIMULATION

- **Simulated transmission coefficients of the proposed scatterer**
  - **@ Designed frequency (17.85 GHz)**
    - **Magnitudes of the co-polarized transmission coefficients are 0.91**
    - **Phase difference is 180°**
    - **81% right-to-left (left-to-right) circular polarization conversion efficiency**

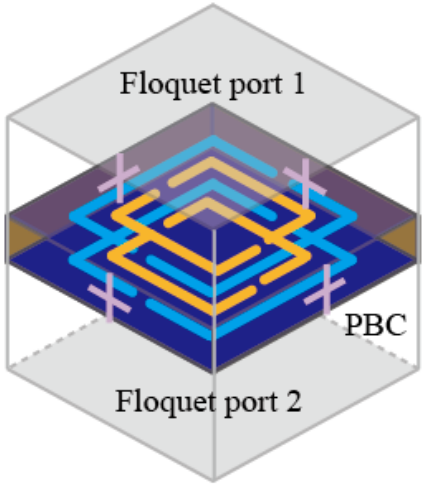

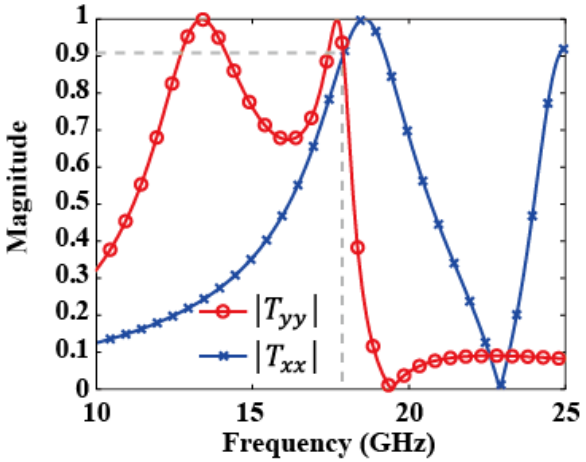

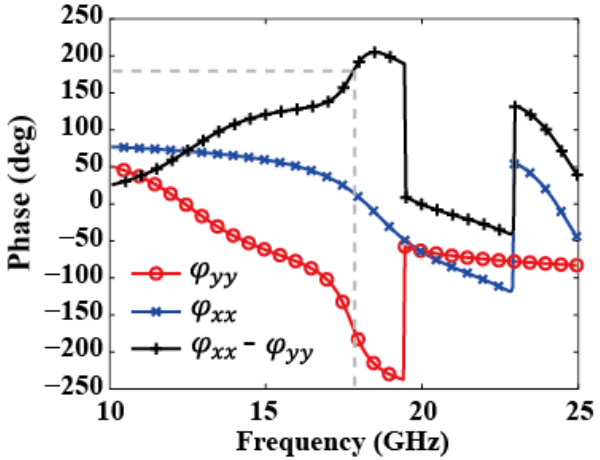

Dielectric substrate: F4B220, ε_r = 2.2, h = 0.8 mm
Geometric parameters: The period of the unit cell is 7×7 mm^2. Side lengths of the two types of square CSRRs are a_l = 5.2 mm and a_s = 3.9 mm. The length of the complementary gap is g = 0.2 mm. The width of the slots is t = 0.2 mm.

METASURFACE DESIGN

- **Geometry of the metasurfaces (top view)**

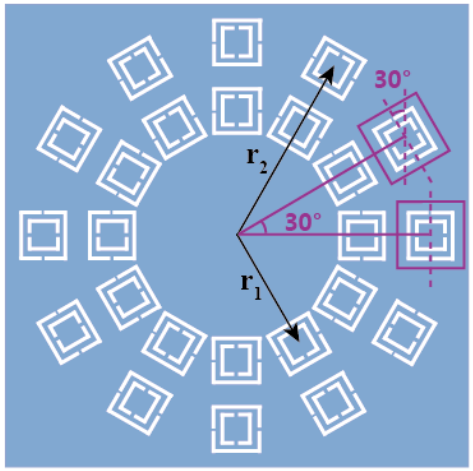

OAM of order $l = 2\alpha / \varphi = 2$

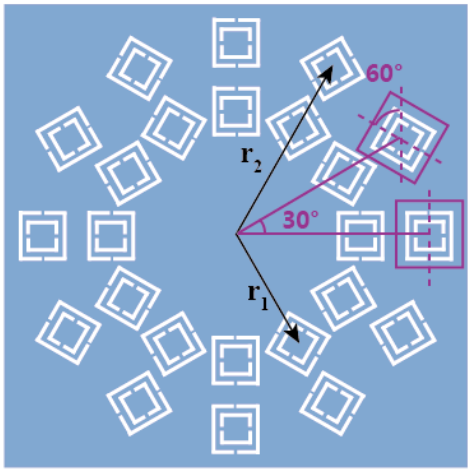

OAM of order $l = 2\alpha / \varphi = 4$

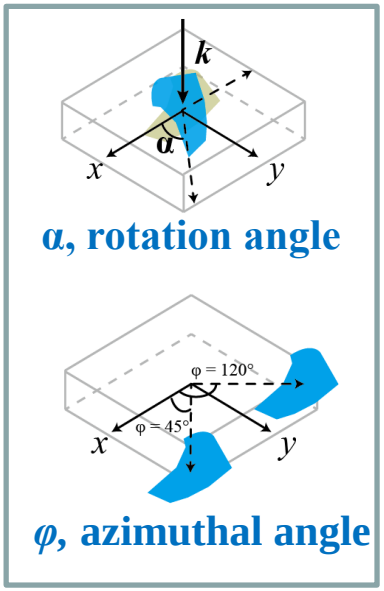

- **Simulation approaches**
  - **Equivalent magnetic dipoles sources, faster**
  - **Simulation software**

METASURFACE DESIGN (CONT.)

- **Magnetic dipole approximation**
  - **Equivalent magnetic point source**
  - **Green's function**
  - **Excitation: right-handed circularly polarized wave**

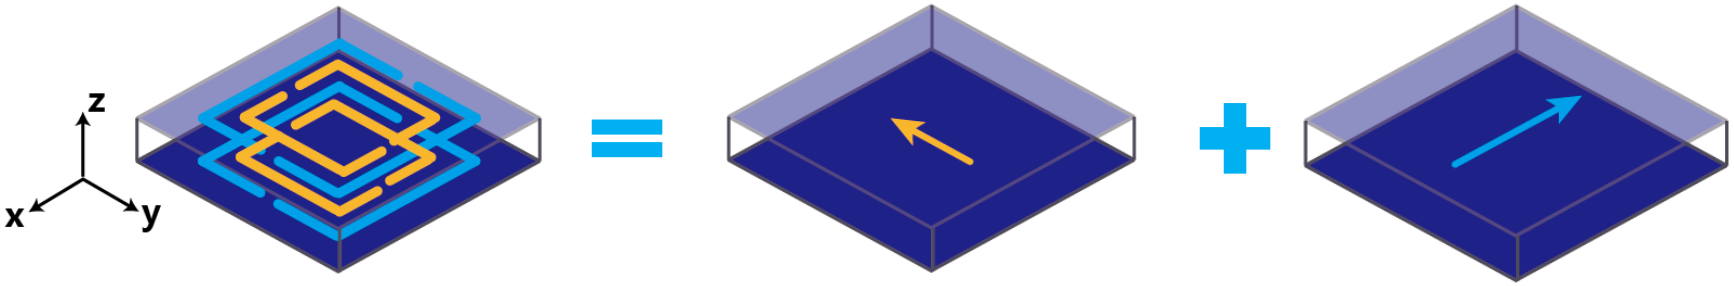

$$\mathrm{E}(\mathrm{r}) = 2\int_V \overline{\mathrm{G}}_m(\mathrm{r},\mathrm{r}')\cdot\mathrm{M}(\mathrm{r}')d\mathrm{r}' = 2\int_V \bigtriangledown g(\mathrm{r},\mathrm{r}')\times\mathrm{M}(\mathrm{r}')d\mathrm{r}'$$

METASURFACE CALCULATION RESULTS

- **Calculated field patterns at a transverse plane of $z = 0.6\lambda_0$**

Amplitude distribution | Phase distribution

OAM of order 2

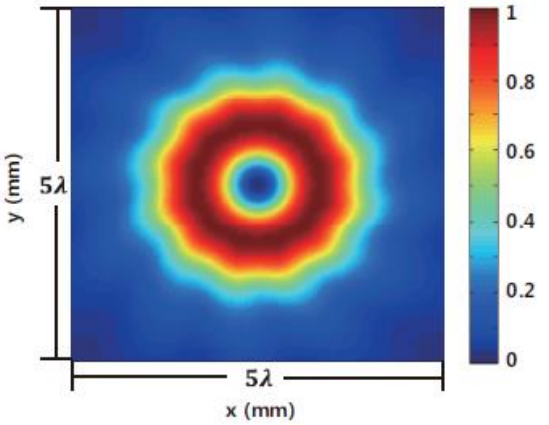

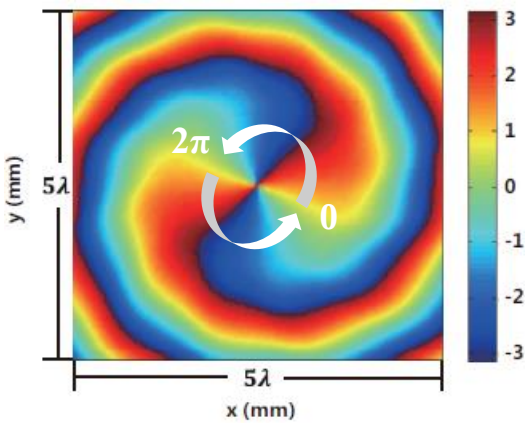

OAM of order 4

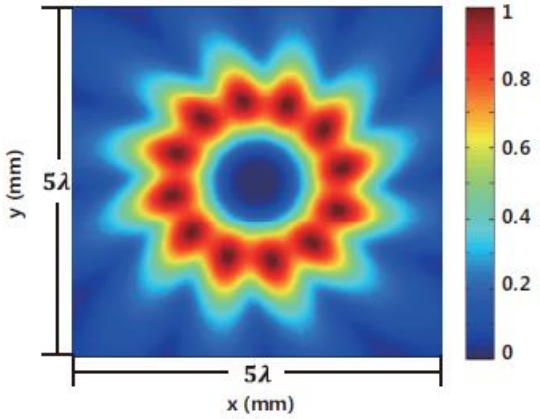

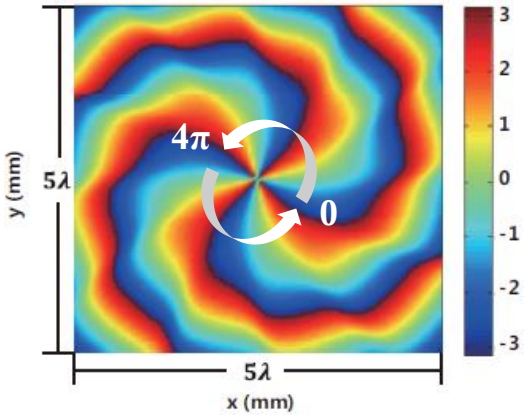

METASURFACE SIMULATION RESULTS

- **Simulated cross-circular polarized field patterns at a transverse plane of z = $0.6\lambda_0$**

Amplitude distribution | Phase distribution

OAM of order 2

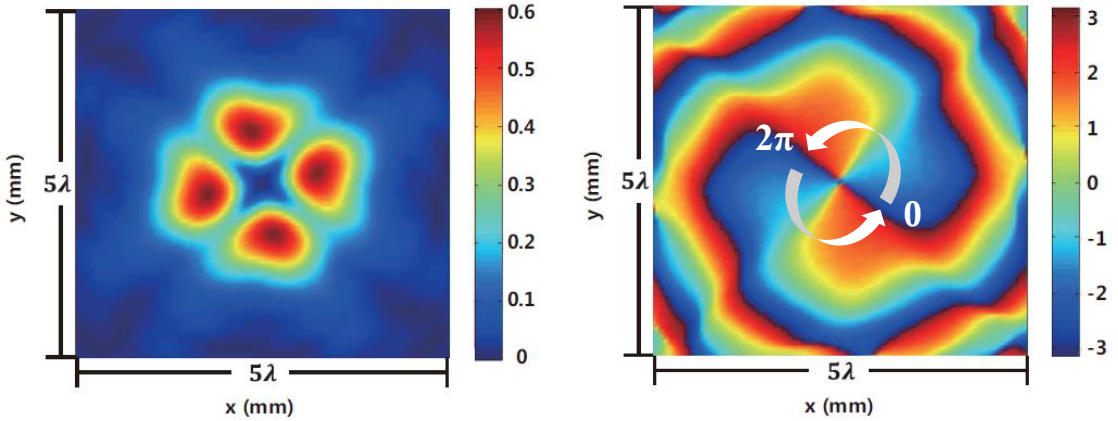

OAM of order 4

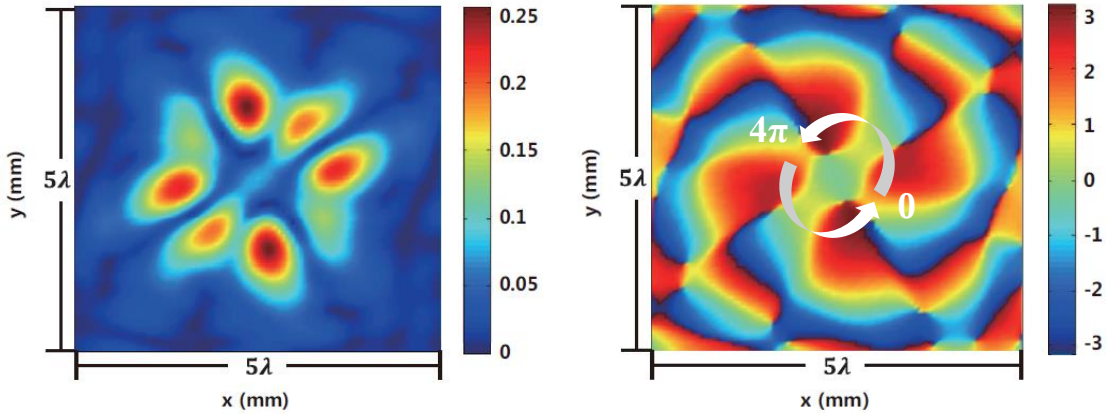

Excitation: right-handed circularly polarized Gaussian beam

METASURFACE SIMULATION RESULTS (CONT.)

- **Efficiency**
  - **Efficiency 81.8% (ratio of the energy carried by the OAM wave in reference to the total energy of the transmitted wave)**
  - **Efficiency 15.2% (ratio of the energy carried by the OAM wave in reference to the total energy of the incident Gaussian beam)**

$$U = \oint_A \mathbf{S} \cdot d\mathbf{A}$$

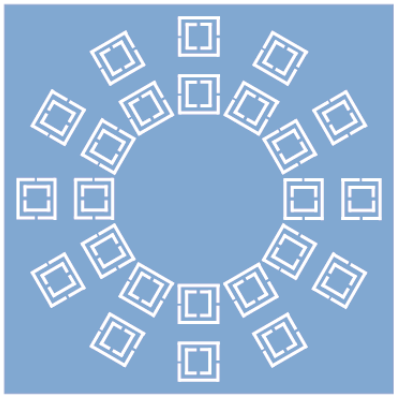

OAM of order 2

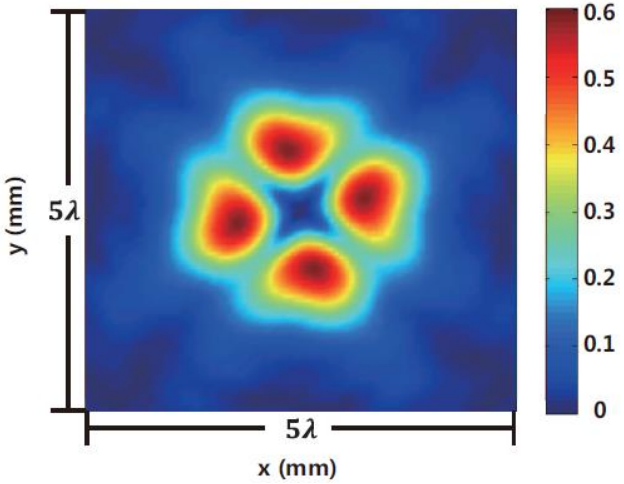

Cross-circular polarization

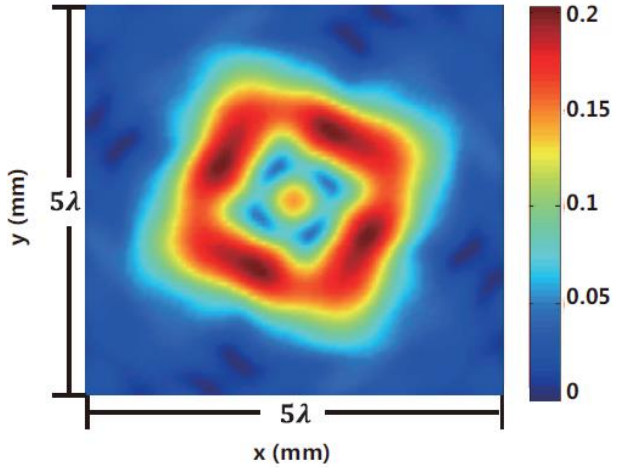

Co-circular polarization

METASURFACE SIMULATION RESULTS (CONT.)

- **Efficiency (the ratio of energy carried by the OAM wave in referernce to the total energy of the incident Gaussian beam)**
  - **39%, 55% and 42% for Region 1, 2 and 3, respectively**

Schematic of the six-circle configuration for the case when OAM is 2

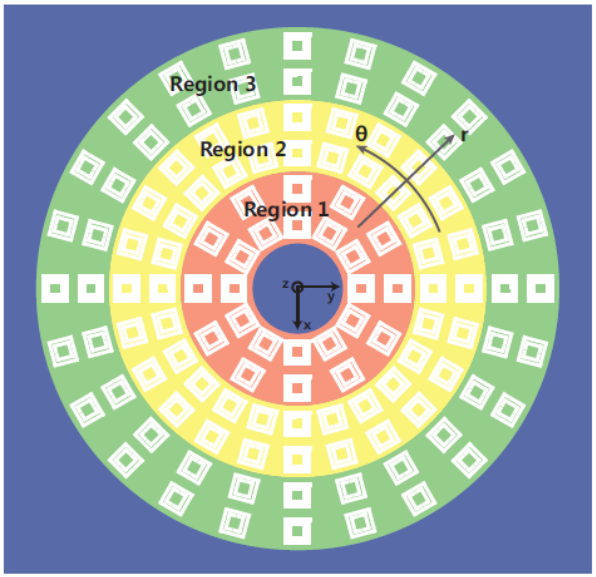

- **Due to the truncation effect of the finite size of the metasurface, the periodicity along θ and r directions is only preserved in Region 2.**
- **By increasing the number of scatterers on the metasurface, the periodicity can be preserved better so that the efficiency can be improved.**

CONCLUSIONS

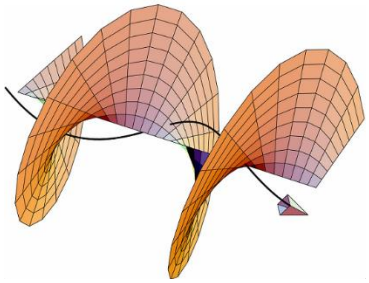

- **Orbital angular momentum (OAM), $L = l\hbar$**
- **An ultrathin complementary metasurface to generate OAM at microwave frequencies is proposed.**
  - **The circuit model is established to reveal the working physics and facilitate the design optimization**
  - **The whole metasurface is modelled by the equivalent magnetic dipole sources. The calculated results show a good agreement with the full-wave simulation results.**
  - **The efficiency of the proposed metasurface is carefully investigated. Thanks to the complementary design, a high transmission efficiency can be potentially achieved by increasing the number of the proposed scatterers.**

Reference: M. L. N. Chen, L. J. Jiang, W. E. I. Sha, "Unltra-thin Complementary Metasurface for orbital angular momentum generation at microwave frequencies," *IEEE Trans. Antennas Propagat.*, accepted.

Q & A

THANK YOU